

Part number

CX 01B 30M



Male modular insert, Mixo series, crimp connection, 1 pole, 2 modules, 300 A 1000 V 8 kV 3



Product description		Material properties	
Product type	Modular insert	Main material	Polycarbonate
Series	Mixo	Colour	RAL 7032 grey
Connection type	Crimp connection	RoHs conformity	Compliant
Gender	Male	China RoHs - EFUP	E
N. of poles	1 pole	REACH SVHC substances	No
Size	2 modules	General ordering information	
Specification	For C30 contacts (95-120 mm)	EAN13 code	8015747289832
Technical data		eCl@ss 8.1	27440205
Current	300 A	ETIM 7.0	EC000438
Voltage	1000 V	Packaging Information	
Rated impulse withstand voltage	8 kV	Packaging length	112,00 mm
Pollution degree	3	Packaging height	95,00 mm
Rated voltage according to UL/CSA	600 V	Packaging width	117,00 mm
IP degree of protection	IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure	Packaging volume	1,24 dm ³
Further technical details		Packaging description	Carton box
Mating cycles	≥ 500	Packaging quantity	5 Pcs
Insulation resistance	≥ 10 GΩ	Packaging EAN code	8015747289986
Contact resistance	≤ 0,2 mΩ	Sub-packaging description	Plastic bag
Weight	2,00 g	Sub-packaging quantity	1 Pcs
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging EAN barcode	8015747289993
UL 94 flammability rating	V-0		

Part number

CX 01B 30M



Catalogue drawings

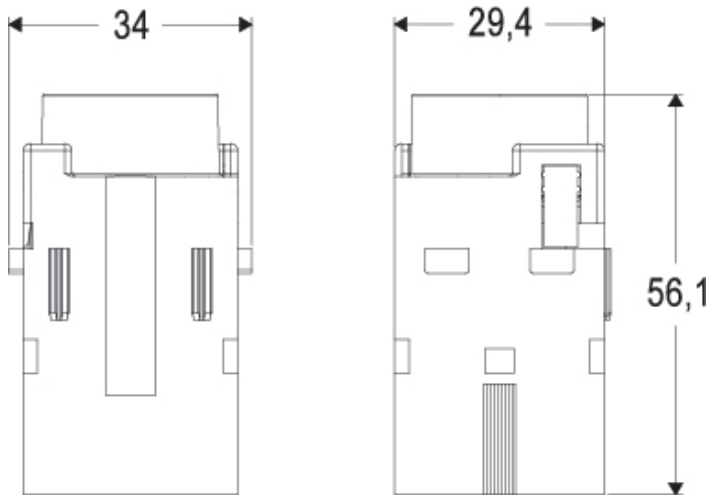

Notes

AVAILABLE FROM: JUNE 2023

the modular inserts must be installed in suitable frames which in turn are installed in traditional housings or COB panel support

Dimensions shown in mm are not binding and may be changed without notice.
