


Nomenclature of patched connectors

Double-ended cordset



High temperature-proof

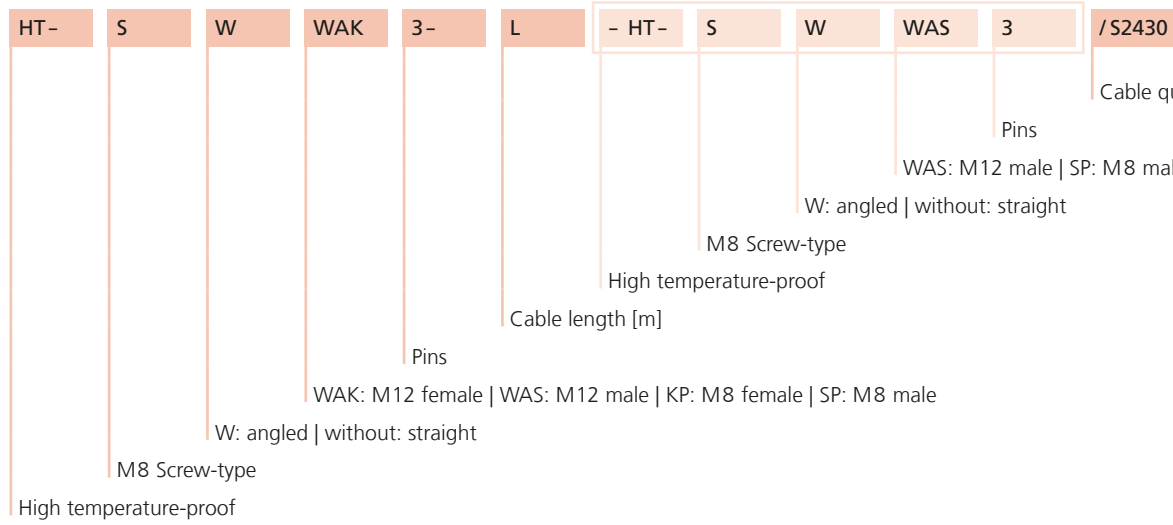

Cable	Material	UL	Colour	Feature
S2430	PTFE/PTFE		WH	-190°C...+260°C







High temperature-proof

Technical data	M12	M8	Receptacles
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Resistance	$\leq 5 \text{m}\Omega$	$\leq 5 \text{m}\Omega$	$\leq 5 \text{m}\Omega$
Ambient temperature product	-20°C...+150°C	-20°C...+150°C	-20°C...+150°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, gold-plated
Contact-carrier material	Plastic, PBT GF	Plastic, PBT GF	Plastic, PBT GF
Grip body material	Plastic, PBT GF	Plastic, PBT GF	
Coupling nut material	Metal, CuZn, nickel-plated	Metal, CuZn, nickel-plated	
Sealing (female) material	FPM/FKM	FPM/FKM	FPM/FKM
Material of external sealing			FPM/FKM
Receptacle housing material			Metal, CuZn, nickel-plated
Standards	IEC 61076-2-101	IEC 61076-2-104	IEC 61076-2-101
Degree of protection (mounted)	IP65	IP65	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3

Due to high-temperature proof materials, our M8- and M12-connectors guarantee a reliable operating-mode even in extraordinary high-temperature applications. Permanent operating temperatures of -20°C to +150°C and a short term maximum operating temperature of +200°C do not state a problem to this product line.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset female, straight, M12	3	250V	4A		PTFE	WH		HT-WAK3-L/S2430	8039210	8036085	8039211
		4	250V	4A		PTFE	WH		HT-WAK4-L/S2430	8036518	8036086	8036154
		5	60V	4A		PTFE	WH		HT-WAK4.5-L/S2430	8039212	8036087	8039213
	Single-ended cordset female, angled, M12	3	250V	4A		PTFE	WH		HT-WWAK3-L/S2430	8039224	8036088	8039225
		4	250V	4A		PTFE	WH		HT-WWAK4-L/S2430	8039226	8036089	8037214
		5	60V	4A		PTFE	WH		HT-WWAK4.5-L/S2430	8039227	8036090	8039228
	Single-ended cordset male, straight, M12	3	250V	4A		PTFE	WH		HT-WAS3-L/S2430	8039231	8036091	8039232
		4	250V	4A		PTFE	WH		HT-WAS4-L/S2430	8039233	8036092	8039234
		5	60V	4A		PTFE	WH		HT-WAS4.5-L/S2430	8039235	8036093	8038342
	Single-ended cordset male, angled, M12	3	250V	4A		PTFE	WH		HT-WWAS3-L/S2430	8039467	8036094	8039468
		4	250V	4A		PTFE	WH		HT-WWAS4-L/S2430	8039469	8036095	8039470
		5	60V	4A		PTFE	WH		HT-WWAS4.5-L/S2430	8039471	8036096	8039472
	Double-ended cordset female, straight, M12	3	250V	4A		PTFE	WH		HT-WAK3-L-HT-WAS3/S2430	8036254	8039479	8039480
		4	250V	4A		PTFE	WH		HT-WAK4-L-HT-WAS4/S2430	8038667	8038668	8038669
		5	60V	4A		PTFE	WH		HT-WAK4.5-L-HT-WAS4.5/S2430	8051958	8039949	8039950
	Double-ended cordset female, angled, M12	3	250V	4A		PTFE	WH		HT-WWAK3-L-HT-WWAS3/S2430	8051956	8039958	8039959
		4	250V	4A		PTFE	WH		HT-WWAK4-L-HT-WWAS4/S2430	8051957	8039961	8039137
		5	60V	4A		PTFE	WH		HT-WWAK4.5-L-HT-WWAS4.5/S2430	8051959	8039963	8039964
	Receptacle female, straight, M12	3	250V	4A					HT-FK3-0,5/16/S2470	8037311		
		4	250V	4A					HT-FK4-0,5/16/S2470	8037322		
		5	60V	4A					HT-FK4.5-0,5/16/S2470	8037323		
	Receptacle male, straight, M12	3	250V	4A					HT-FS3-0,5/16/S2470	8037288		
		4	250V	4A					HT-FS4-0,5/16/S2470	8037292		
		5	60V	4A					HT-FS4.5-0,5/16/S2470	8037293		
	Single-ended cordset female, straight, M8	3	60V	4A		PTFE	WH		HT-SKP3-L/S2430	8036605	8036097	8039482
		4	60V	4A		PTFE	WH		HT-SKP4-L/S2430	8039483	8036098	8037215
	Single-ended cordset female, angled, M8	3	60V	4A		PTFE	WH		HT-SWKP3-L/S2430	8039484	8036099	8039485
		4	60V	4A		PTFE	WH		HT-SWKP4-L/S2430	8039486	8036100	8037216
	Single-ended cordset male, straight, M8	3	60V	4A		PTFE	WH		HT-SSP3-L/S2430	8039487	8036101	8039488
		4	60V	4A		PTFE	WH		HT-SSP4-L/S2430	8039489	8036102	8039490

* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.

		Body				Cable			Item description	L = cable length*		
		Pins	U[max]	I[max]	Special	Material	Color	UL		2m / 1m	5m / 2m	10m / 5m
	Single-ended cordset male, angled, M8	3	60V	4A		PTFE	WH		HT-SWSP3-L/S2430	8039491	8036103	8039492
		4	60V	4A		PTFE	WH		HT-SWSP4-L/S2430	8039493	8036104	8039494
	Double-ended cordset female, straight, M8	3	60V	4A		PTFE	WH		HT-SKP3-L-HT-SSP3/S2430	8043355	8039972	8039973
		4	60V	4A		PTFE	WH		HT-SKP4-L-HT-SSP4/S2430	8051990	8039975	8039976
	Double-ended cordset female, angled, M8	3	60V	4A		PTFE	WH		HT-SWKP3-L-HT-SWSP3/S2430	8051991	8039978	8039979
		4	60V	4A		PTFE	WH		HT-SWKP4-L-HT-SWSP4/S2430	8051992	8039981	8039982
	Double-ended cordset male, angled, M8											

High temperature-proof

* Standard cable-lengths for single-ended cordset: 2m, 5m, or 10m. For double-ended cordset: 1m, 2m, or 5m. Wire length for receptacles: 0.5m (0.2m for POWER). Other cable- and wire lengths are available upon request.