



Capacitive Sensors Series 40 - NAMUR EN 60947-5-6



Housing M 30 x 1.5

- For use in areas with the risk of gas explosion, zone 0
- Housing material: Brass
- Sensing distance 2...15 mm adjustable

Certificate:



DMT 03 ATEX E 048

IECEX BVS 07.0031

Ex II 1G Ex ia IIC T1-T6 Ga

Ex ia IIC T1-T6 Ga





Technical data

Flush mountable

| | |
|---|------------------------------------|
| Operating distance S_n | 10 mm |
| Operating distance min. / max. adjustable | 2...15 mm |
| Electrical version | 2-wire DC |
| Output function | NAMUR DIN 60947-5-6 |
| Type | KAS-40-A14-N |
| Art. No. | 400 400 |
| Operating voltage (U_B) | 5 - 15 V DC, $U_i = 15$ V DC |
| Output current active surface free | < typ. 1.5 mA |
| Output current active surface covered | > typ. 2.5 mA |
| Self-inductance (L) | 0.2 mH |
| Self-capacitance (C) | 250 nF |
| Permitted residual ripple max. | 5 % |
| Frequency of operating cycles max. | 50 Hz |
| Permitted ambient temperature | -20...+70 °C |
| LED-display | Yellow |
| Degree of protection IEC 60529 | IP 67* |
| Connection cable | 2 m, PUR, 2 x 0.75 mm ² |
| Housing material | Brass |
| Active surface | PTFE (FDA 21 CFR 177.1550) |
| Lid | PA / PPO |
| Accessories (is delivered with the unit) | 2 pieces nuts M 30 |

* With sealed potentiometer screw

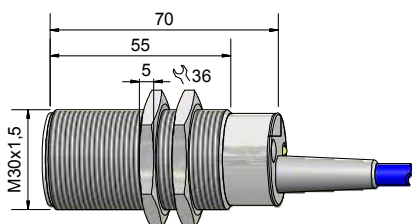

All specifications are subject to change without notice. (06/2014)

Made in Germany