



## Wireless universal transmitter RF 96 ST SW915 LBT Material number: 1432821

### Features/Options:


- Thermoplastic enclosure
- Mounting details to EN 50047
- Plug-in connector M12
- sWave® wireless technology
- Easy programming of receiver
- LBT - Listen before Talk software (necessary in conjunction with potential interference)

- Option for switching off by external contact
- No wiring and pipe laying required
- Power supply by Lithium battery
- Output signal can be individually configured at the receiver

### Notes

- The RF 96 ST may be used in combination with wireless inductive sensor RF IS or wireless magnetic sensor RF RC 20
- Connection of external switching contact (potentialfree contact) with gold contacts possible.
- The battery must be ordered separately

### Dimensions

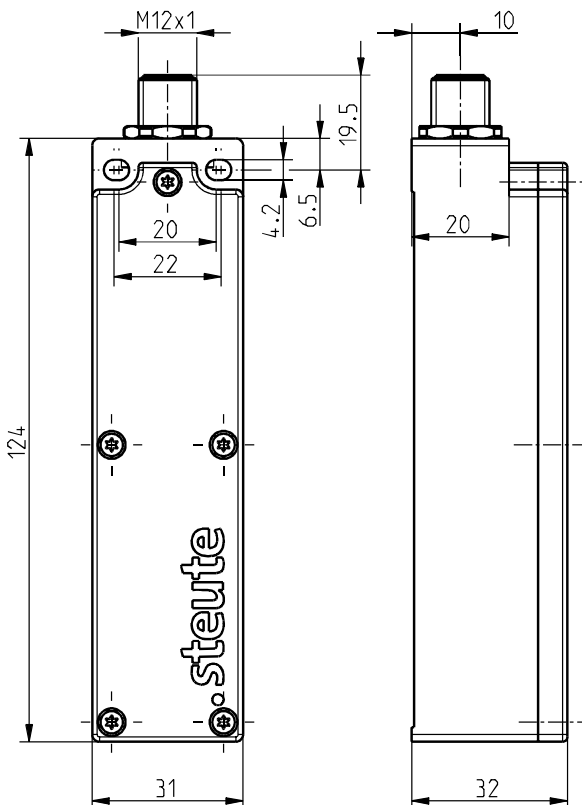

### Technical data

Applied standards	EN 60947-5-1, EN 61000-6-2, EN 61000-6-3, EN 301 489-1, EN 301 489-3, EN 300 220-1, EN 300 220-2
Enclosure	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Tightening torque	M4 enclosure mounting screws: max 1.2 Nm M2.5 cover screws: approx. 0.45 Nm
Degree of protection	IP 67 to IEC/EN 60529
Protocol	sWave®
Frequency	915 MHz (USA, Canada, Mexico, Australia)
Transmission power	< 25 mW
Data rate	66 kbps
Channel bandwidth	550 kHz
Voltage supply	lithium battery Tadiran TL-5920 (replaceable), alternatively SL-2770
System	Li/SOCl <sub>2</sub>
Nominal voltage	3.6 V
Nominal capacity	8.5 Ah

Alternatively:

Errors and omissions excepted.



Wireless universal transmitter  
RF 96 ST SW915 LBT  
Material number: 1432821


## Technical data

Voltage supply	lithium battery Tadiran SL-2770 (replaceable)
System	Li/SOCl <sub>2</sub>
Nominal voltage	3.6 V
Nominal capacity	8.5 Ah
Battery life	depending on operation cycles inductive sensor: 10 s - approx. 3.7 years 100 s - approx. 3.9 years 1,000 s - approx. 3.9 years magnetic sensor / external contact: 10 s - >10 years (max. manufacturer's specification of storage life)
Connection	plug-in connector M12 x 1, 4-pole
Connectable devices	RF IS M8, RF IS M12, RF IS M18, RF IS M30, RF RC 20, external switches using the connecting cable 1215497
Ambient temperature	-20 °C ... +65 °C
Operation cycles	max. 12000 telegrams with repetitions/h
Switching frequency	max. 5 Hz
Standby current	15 µA
Wireless range	max. 450 m outdoors, max. 40 m indoors
Actuating time	min. 80 ms
Note	status signal adjustable via jumper, no, 10 s, 100 s, 1000 s, 10000 s delivery state: jumper position without status signal, transmission of battery voltage and switching condition
Wireless approvals	USA: FCC - XK5-RFRXSW915 Canada: IC - 5158A-RFRXSW915 Mexico: IFT - RCPSTRF17-1886
Weight	80 g



## Wireless universal transmitter RF 96 ST SW915 LBT Material number: 1432821


### Plug-in configuration

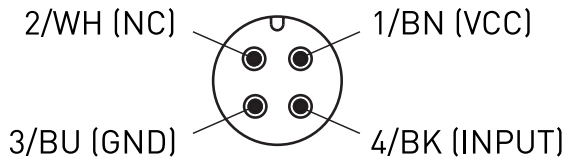

NC = not connected

Colour coding only valid for  
coupling 4-poles mat. no. 1215497 and  
coupling 4-poles mat. no. 1262873

### External switch contact



### Sensors

