



## Magnetic sensor Extreme RC 4 1S - 5m +130°C Extreme Material number: 1323510


### Features/Options:

- Heat-resistant up to +130 °C
- Thermoplastic enclosure
- Long life
- 1 Reed contact
- Actuation from front and from side
- Switching distance up to 48 mm depending on the actuating magnet
- With pre-wired cable
- Attention: Please state required international approvals with your order!

### Notes

- The actuator is not included in the delivery of the switches

### Dimensions

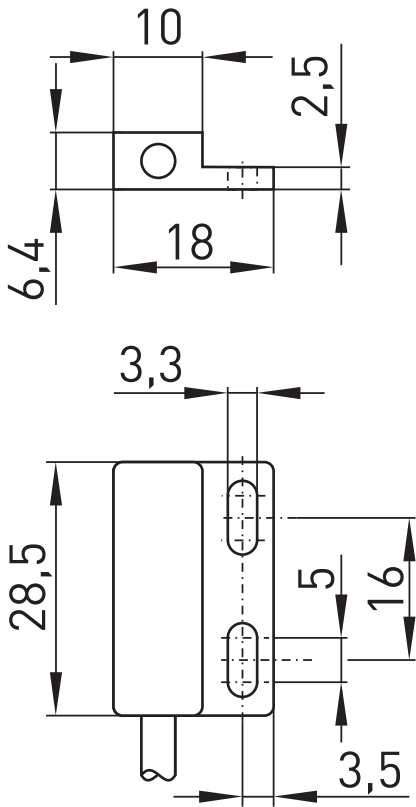

### Technical data

Applied standards	EN 60947-5-2
Enclosure	thermoplastic
Degree of protection	IP 67 to IEC/EN 60529
Switching system	reed contacts
Switching elements	1 NO contact
Connection	pre-wired cable, Silicone
Cable cross-section	2 x 0.34 mm <sup>2</sup>
Cable length	5 m
Switching voltage	max. 125 VAC / 230 VDC
Switching current	max. 0.5 A
Switching capacity	max. 15 W
Switching frequency	max. 200 Hz
Ambient temperature	-10 °C ... +130 °C
Mechanical life	10 <sup>9</sup> operations
Repeatability	± 0.02 mm
Vibration resistance	20 g
Weight	139 g

Errors and omissions excepted.



Magnetic sensor Extreme  
RC 4 1S - 5m +130°C Extreme  
Material number: 1323510

Contact diagram

