



## Foot switch with thermoplastic enclosure


KF 1W - 5m

Material number: 1049284 (Material number old: 88158906)


### Features/Options:

- Thermoplastic enclosure
- Small flat design
- Reed contacts (1-pole change-over contact) for low currents from 1 mA to 1 A
- With pre-wired cable

### Dimensions

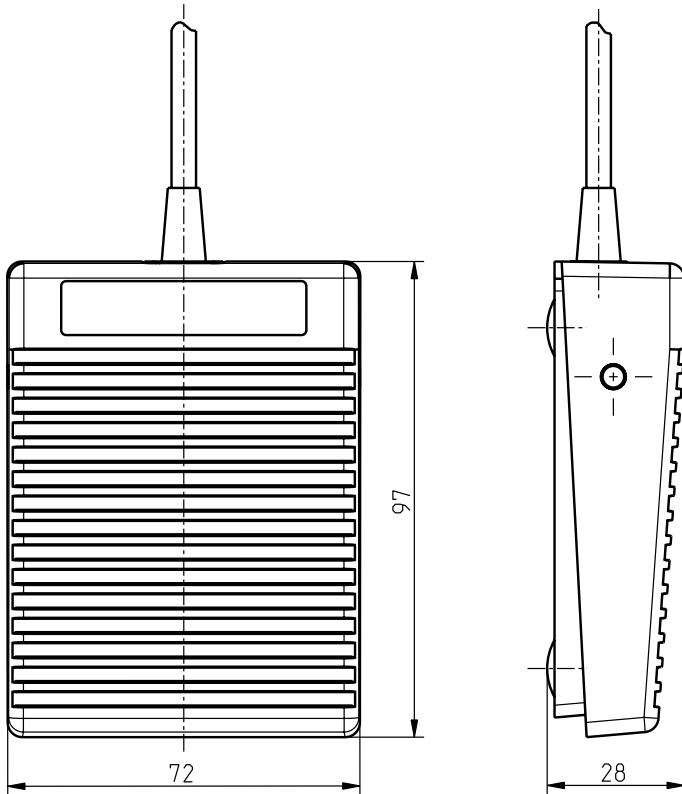

### Technical data

Applied standards	EN 60947-5-1
Enclosure	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Pedal	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Degree of protection	IP 65 to IEC/EN 60529
Connection	cable 3 x AWG 20
Cable length	5 m
Cable diameter	4.8 mm $\pm$ 3%
Cable cross-section	3 x 0.52 mm <sup>2</sup>
Switching system	reed contacts
Switching elements	1-pole change-over contact
Switching voltage	12 ... 250 VAC/DC
Switch-on current	max. 1 A
Switch-on power	max. 30 VA
Ambient temperature	-10 °C ... +60 °C
Mechanical life	> 1 million operations
Approvals	
Weight	330 g

Errors and omissions excepted.



Foot switch with thermoplastic enclosure

KF 1W - 5m

Material number: 1049284 (Material number old: 88158906)

Contact diagram

