



## Multi-function handle


### TG-S G 2Ö SS

Material number: 1169018 (Material number old: 97955906)

#### Features/Options:

- Thermoplastic handle
- Long life
- Emergency-stop push button to EN 60947-5-5: 2-channel  $\ominus$
- Black start push button: 1 NO contact
- Grey reset push button: 1 NO contact
- Green LED
- Green enabling push button: 1 NO contact
- With plug-in connector M23 x 1, 12-pole


#### Dimensions

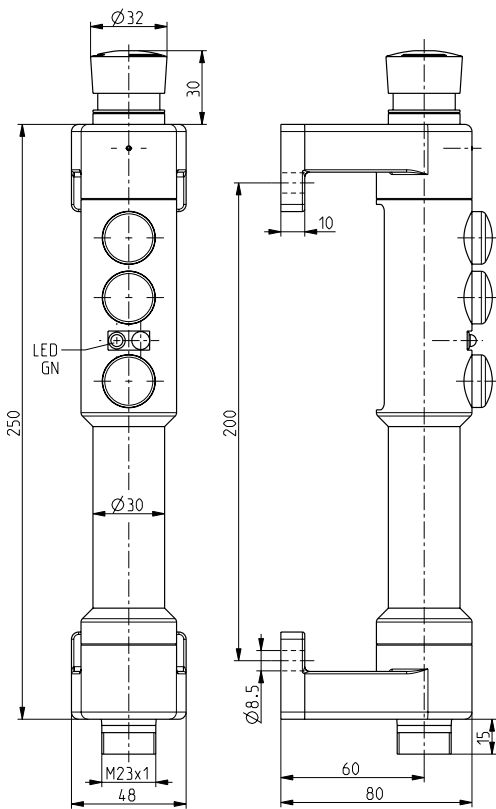


#### Technical data

Applied standards	EN 60947-5-1, EN 60947-5-5
Enclosure	POM, glass-fibre reinforced, impact resistant
Degree of protection	IP 65 to IEC/EN 60529
B <sub>10d</sub> (10 % load)	100 000
T <sub>M</sub>	max. 20 years
Connection	Plug-in connector, A-coded
Rated operating current/voltage I <sub>e</sub> /U <sub>e</sub>	0.6 A/115 VAC LEDs: 10 mA/24 VDC
Rated insulation voltage U <sub>i</sub>	115 VAC
Degree of pollution	3
Mechanical life	> 50 000 operations
Ambient temperature	-25 °C ... +55 °C
Weight	465 g

#### Contact diagram LEDs



#### Contact diagram enabling push-button






## Multi-function handle


TG-S G 2Ö SS

Material number: 1169018 (Material number old: 97955906)


Plug-in configuration (view from plug side)

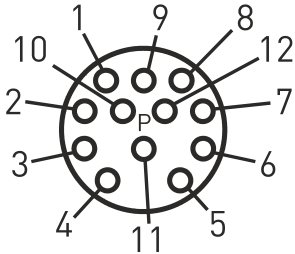

Contact diagram start push-button



Contact diagram reset push-button



Contact diagram emergency-stop push-button

