



Foot switch with metal enclosure


GF 2 1ÖS RE/1ÖS RE

Material number: 1048772 (Material number old: 82105601)

Features/Options:

- With latching: ON/OFF principle
- 2-pedal type
- 2 contacts per pedal
- Metal enclosure
- Low pedal height
- Wiring compartment

Dimensions

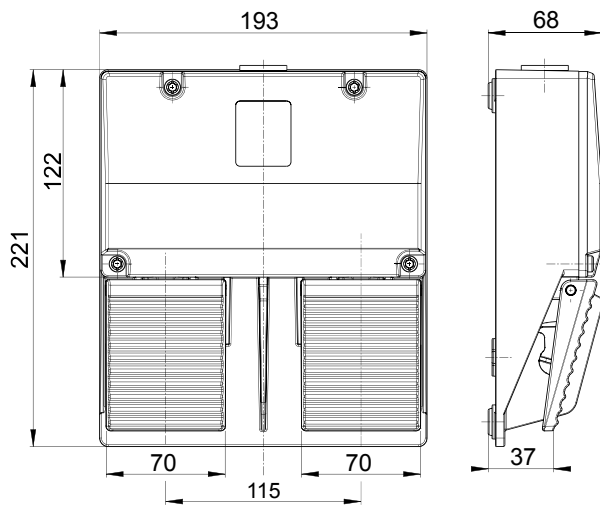

Technical data

Applied standards	EN 60947-5-1
Enclosure	aluminium die-cast, powder-coated
Cover	aluminium die-cast, powder-coated
Pedal	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Degree of protection	IP 65 to IEC/EN 60529
Connection	screw connection terminals
Cable cross-section	max. 2.5 mm ² (incl. conductor ferrules)
Cable entry	1 x M25 x 1.5
Contact material	silver
Switching system	slow action, positive break NC contacts \ominus
Switch insert	1 x ES 60 GF RE per pedal
Switching elements	1 NC/1 NO contact with latching
Utilisation category	AC-15
Rated operating current/voltage I_e/U_e	16 A/400 VAC
Short-circuit protection	16 A gG/gN fuse
Ambient temperature	-25 °C ... +80 °C
Mechanical life	> 1 million operations
Approvals	
Weight	1950 g

Errors and omissions excepted.




Foot switch with metal enclosure

GF 2 1ÖS RE/1ÖS RE

Material number: 1048772 (Material number old: 82105601)

Contact diagram



Switching diagram

