



Magnetic sensor

RC 40 1S-1m

Material number: 1046060 (Material number old: 24020101)


Features/Options:

- Thermoplastic enclosure
- Long life
- 1 Reed contact
- Actuation from front and from side
- Switching distance up to 29 mm depending on the actuating magnet
- With pre-wired cable

Notes

- The actuator is not included in the delivery of the switches

Dimensions

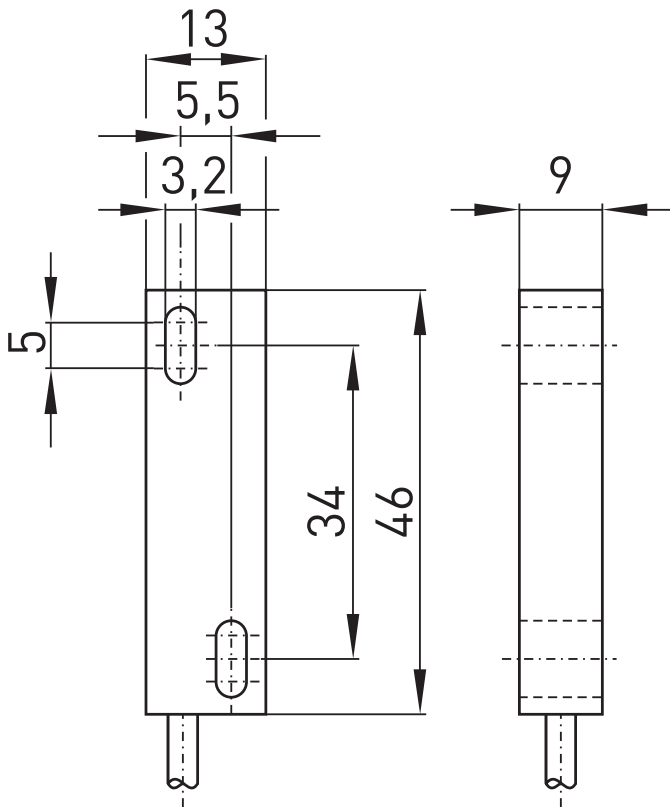

Technical data

Applied standards	EN 60947-5-2
Enclosure	polyamide, glass-fibre reinforced
Degree of protection	IP 67 to IEC/EN 60529
Switching system	reed contacts
Switching elements	1 NO contact
Connection	pre-wired cable PVC LiYY AWG 26
Cable cross-section	2 x 0.14 mm ²
Cable length	1 m
Switching voltage	max. 250 VDC
Switching current	max. 1 A
Switching capacity	max. 15 W
Switching frequency	max. 200 Hz
Ambient temperature	-10 °C ... +80 °C
Mechanical life	10 ⁹ operations
Repeatability	± 0.02 mm
Vibration resistance	20 g
Weight	22 g

Errors and omissions excepted.




Magnetic sensor

RC 40 1S-1m

Material number: 1046060 (Material number old: 24020101)

Contact diagram

BU  BN