

## Accessories for ST 14 / Ex ST 14

### Angled actuator ST 14-B5

Material number: 1040841 (Material number old: 04.14.8202)


#### Features/Options:

- Rubber mounting damps vibrations on guard devices
- Suitable for hinged guards
- Stainless steel 1.4301
- Actuating radius on hinged guards:  
Axial misalignment  $x = 15$  mm:  
a: min. 500 mm, b: min. 1000 mm  
Axial misalignment  $x = 0$  mm:  
a: min. 250 mm, b: min. 600 mm

#### Notes

- 1 slot sealing plug is included in delivery


#### Dimensions

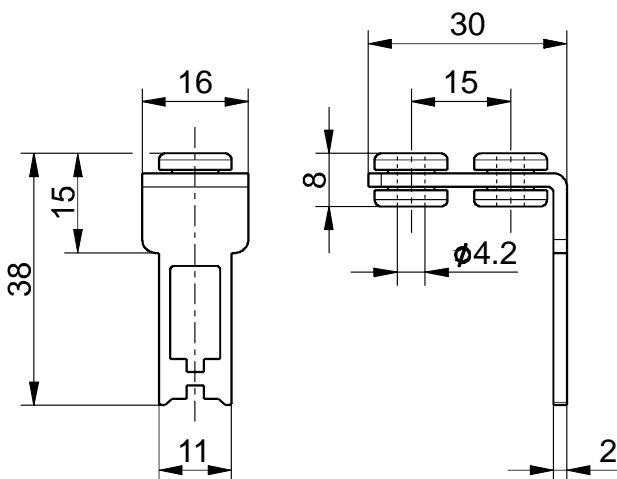

#### Technical data

Weight	10 g
--------	------

#### Actuating radii



The axis of the hinge should be  $x$  mm above the top edge of the safety switch and in the same plane.

$a$  = Actuating radius to the plane of the actuator

$b$  = Actuating radius in line with the plane of the actuator

$x$  = Axial misalignment

Attention!  $x$  must be referred to the surface of the enclosure and not to the inserted actuator!

Errors and omissions excepted.