



## Foot switch with metal enclosure


GF HS 4-20 mA

Material number: 1048578 (Material number old: 81183003)

### Features/Options:

- With Hall sensor: Analogue output
- Metal enclosure
- Output value: 4 ... 20 mA
- Analogue output signal proportional to pedal travel
- High level of stability and low pedal height
- Wiring compartment

### Dimensions

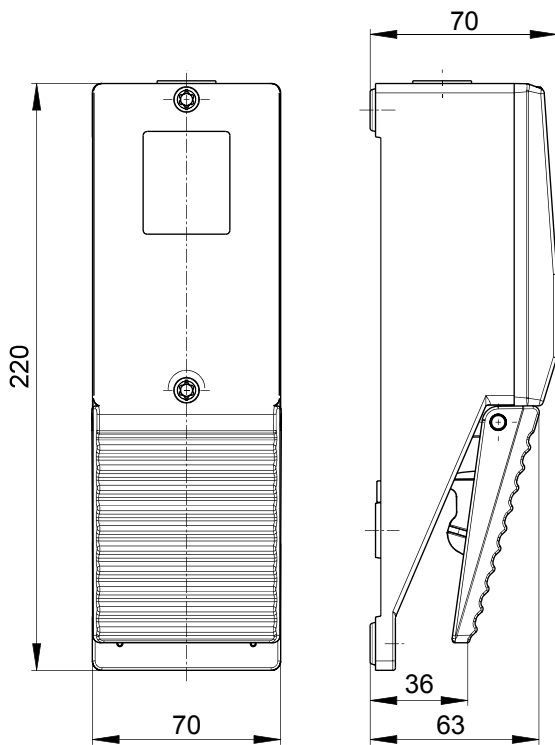

### Technical data

Applied standards	EN 60947-5-1
Enclosure	aluminium die-cast, powder-coated
Cover	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Pedal	thermoplastic, glass-fibre reinforced, impact resistant, self-extinguishing UL 94 V-0
Degree of protection	IP 65 to IEC/EN 60529
Connection	screw connection terminals
Cable cross-section	max. 1.0 mm <sup>2</sup> (incl. conductor ferrules)
Cable entry	1 x M20 x 1.5
Switching system	Hall sensor with analogue output
Output current I <sub>a</sub>	4...20 mA ±1 %
Rated operating current/voltage I <sub>e</sub> /U <sub>e</sub>	45 mA/15 ... 30 VDC
Ambient temperature	-10 °C ... +70 °C
Mechanical life	> 1 million operations
Approvals	<b>ERC</b>
Weight	600 g



Foot switch with metal enclosure

GF HS 4-20 mA

Material number: 1048578 (Material number old: 81183003)

## Contact diagram

