


# VISOR® V20 Robotic Professional, medium field of view

Vision sensor for object detection, presence check, completeness check, measurement and positioning tasks





## PRODUCT HIGHLIGHTS

- Calibration methods for robotics applications
- Result offset 3D for direct gripper point transmission to robot
- Offset of work plane
- Gripping space check
- Can be used for all common 2D codes (ECC 200 data matrix), common 1D bar codes and OCR

Optical data		Functions	
Resolution	1440 x 1080 Pixel	Number of jobs / detectors	max. 255 / max. 255
Imaging chip CMOS	1/2.9", monochrome / color	Detectors	Position tracking: X/Y and orientation; <b>Pattern matching, contour, 3D contour</b> : teach-in and detection of patterns and contours; <b>Calliper</b> : distance between edges; <b>BLOB, grey threshold, brightness</b> : evaluation of brightness; <b>Contrast</b> : evaluation of contrast;
Integrated lens, focal length [mm]	12 (medium)		<b>Barcode</b> : reading 1D bar codes, EAN, UPC, RSS, 2/5 Interleaved, 2/5 Industrial, code 32, code 39, code 93, code 128, GS1, pharm code, codabar; <b>Datacode</b> : reading 2D codes: ECC200, QR code, GS1, PDF 417; <b>OCR</b> reading of fonts; <b>Result processing: Text, Math</b> : checking and calculating with results from detectors
Pixel size	3.45 µm x 3.45 µm		
Focus	Motorized		
Adjustment range	25 mm to infinity		
Integrated illumination	White (5000 K), red (635 nm) <sup>1</sup> , infrared (850 nm) <sup>1</sup> LEDs		
Minimum field of view, X x Y	10 x 8 mm		
Target laser	Laser: red (635 nm) class 1  (IEC 60825-1)		
Electrical data		Mechanical data	
Operating voltage, +U <sub>B</sub>	18 ... 30 DC <sup>3</sup>	Dimensions	70.4 x 45 x 45 mm (without plug)
Current consumption (without I/O)	≤ 300 mA	Enclosure rating	IP 67 & IP 65
Protective circuits	Reverse-polarity protection, U <sub>B</sub> / short-circuit protection of all outputs	Material, housing	Aluminium, die-cast, RoHS compliant
Power On Delay	Approx. 13 s after Power on	Material, front screen	Plastic
Outputs	PNP/NPN (switchable)	Ambient temperature: operation	0 ... +50 °C <sup>4</sup>
Max. output current (per output)	50 mA, 100 mA (pin 12)	Ambient temperature: storage	-20 ... +60 °C <sup>4</sup>
Switching threshold inputs incl. encoder	PNP / NPN	Weight	Approx. 200 g
Input resistance	High > U <sub>B</sub> -1 V / Low < 3V	Plug connections	Supply and I/O M12, 12-pin Ethernet M12, 4-pin
Interfaces	> 20 kΩ	Vibration resistance	EN 60068-2-6
Inputs/outputs	Ethernet (LAN), EtherNet/IP, PROFINET, SensoWeb, Service Port	Shock resistance	EN 60068-2-27
Encoder	2 inputs, 2 outputs, 6 selectable inputs/outputs		
	✓		

<sup>1</sup> Not color hardware    <sup>2</sup> color hardware    <sup>3</sup> max. ripple < 5V<sub>s</sub>    <sup>4</sup> 80 % air humidity, noncondensing

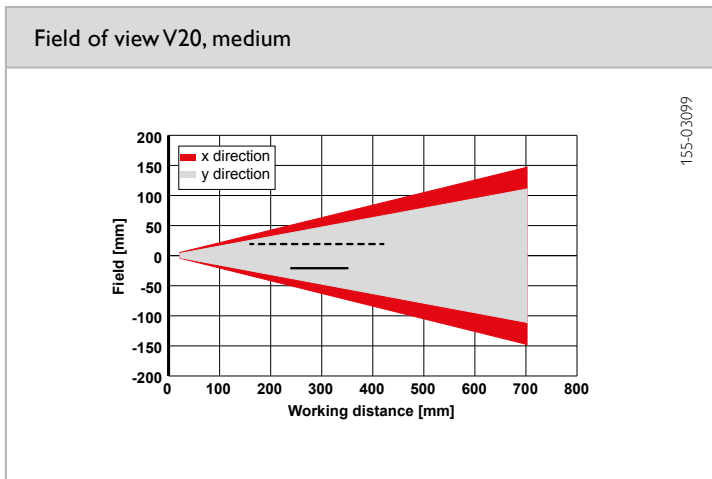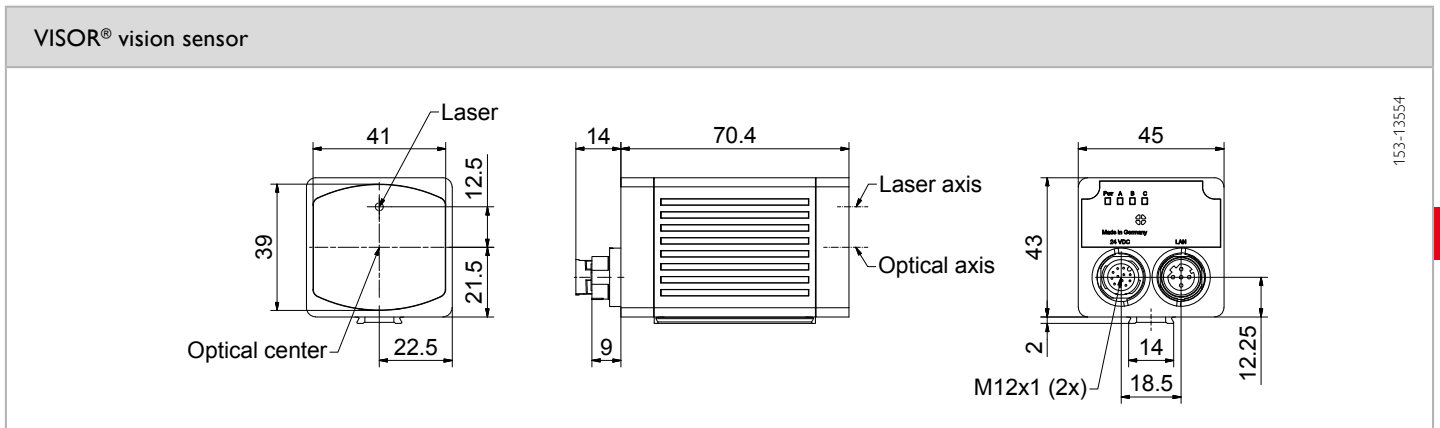

- - - - - Increased depth of field
- Normal depth of field

Illumination	Part number	Article number	Accessories	
White	V20-RO-P3-W-M-M2-L	632-91121	Connection cables	From Page A-46
Red	V20-RO-P3-R-M-M2-L	632-91124	Illumination	From Page A-33
Infrared	V20-RO-P3-I-M-M2-L	632-91127	Brackets	From Page A-4
White	V20C-RO-P3-W-M-M2-L	632-91131	Interface accessories	From Page A-53